
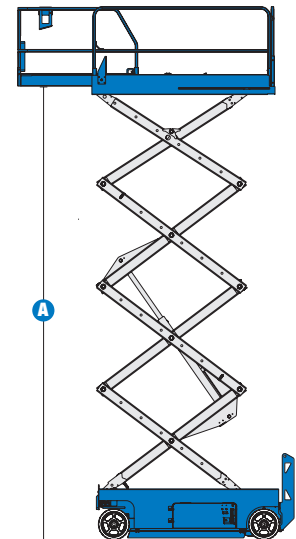



Specifications

MODELS	GS™-2032		GS™-2632	
MEASUREMENTS	US	Metric	US	Metric
Working height max*	26 ft	8.10 m	32 ft	9.92 m
A Platform height max	20 ft	6.10 m	26 ft	7.92 m
B Platform length - outside	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m
extended	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m
C Platform width - outside	2 ft 8 in	.81 m	2 ft 7 in	.79 m
Guardrail height: ANSI, CSA	3 ft 3 in	.99 m	3 ft 3 in	.99 m
CE 3 ft 7 in	1.10 m	3 ft 7 in	1.10 m	
Roll-out platform extension	3 ft	.91 m	3 ft	.91 m
Toeboard height	6 in	.15 m	6 in	.15 m
Height - stowed: platform	3 ft 3 in	.99 m	3 ft 9.5 in	1.16 m
D solid rails-ANSI/CSA/AUS	6 ft 8 in	2.03 m	—	—
solid rails-CE	7 ft	2.13 m	—	—
folding guardrails	7 ft	2.13 m	7 ft 5 in	2.26 m
rails folded	5 ft 10 in	1.78 m	6 ft 3 in	1.91 m
E Length - stowed	8 ft	2.44 m	8 ft	2.44 m
Length - extended	10 ft 11 in	3.33 m	10 ft 11 in	3.33 m
F Width	2 ft 8 in	.81 m	2 ft 8 in	.81 m
G Wheelbase	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m
H Ground clearance - center	3.5 in	.09 m	3.5 in	.09 m
I - with pothole guards deployed	.88 in	.02 m	.88 in	.02 m



PRODUCTIVITY				
Lift capacity	800 lbs	363 kg	500 lbs	227 kg
Extension deck capacity	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		25%	
Turning radius - inside	zero	zero	zero	zero
Turning radius - outside	7 ft	2.13 m	7 ft	2.13 m
Raise / lower speed	30 / 26 sec	30 / 26 sec	37 / 24 sec	37 / 24 sec
Controls	proportional		proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tires - solid non-marking	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm

POWER				
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6V 225 Ah batteries)	
Hydraulic system capacity	7.5 gal	28.4 L	5.5 gal	20.8 L

WEIGHT***				
ANSI, CSA	3,574 lbs	1,621 kg	4,413 lbs	2,002 kg
CE, AUS	4,024 lbs	1,825 kg	4,313 lbs	1,956 kg

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 *** Weight will vary depending on options and/or country standards.